
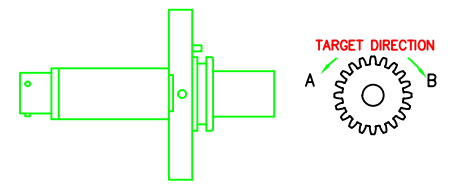


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APP




- SUPPLY VOLTAGE: 4.5V TO 30V DC REGULATED
- SUPPLY CURRENT: 25mA MAX @ NO LOAD
- OUTPUT TYPE: PUSH/PULL, SUPPLY TRACKING
- OUTPUT SATURATION VOLTAGE HIGH: 0.6V MAX @ 30mA
- OUTPUT SATURATION VOLTAGE LOW: 0.4V MAX @ -30mA
- PROTECTION: REVERSE POLARITY AND OUTPUT SHORT CIRCUIT
- OPERATING FREQUENCY: 0Hz TO 15kHz
- AIR GAP: 0.100" (SEE NOTE 1)
- DUTY CYCLE: 50% ± 25% DEPENDENT ON TARGET GEOMETRY
- PHASE SHIFT: 90° ± 45° DEPENDENT ON TARGET GEOMETRY (SEE ALIGNMENT)
- ALIGNMENT: 12P (2M) SPUR GEAR CONTACT FACTORY FOR CUSTOM ALIGNMENT
- OPERATING TEMPERATURE: -40°C TO 125°C
- STORAGE TEMPERATURE: -40°C TO 125°C
- MATING CONNECTOR: MIL-DTL-26482 TYPE 10-6SN
- ENVIRONMENT RATING: IP68

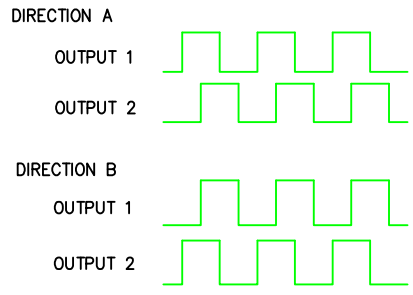

GEAR DIRECTION	OUTPUT 1	OUTPUT 2
DIRECTION A	LEAD	LAG
DIRECTION B	LAG	LEAD

NOTES:

1. AIR GAP IS DEPENDENT ON TARGET GEOMETRY AND OPERATING FREQUENCY. HIGHER OPERATING FREQUENCIES AND FINER PITCH GEARS MAY REQUIRE AIR GAPS LESS THAN 0.100"

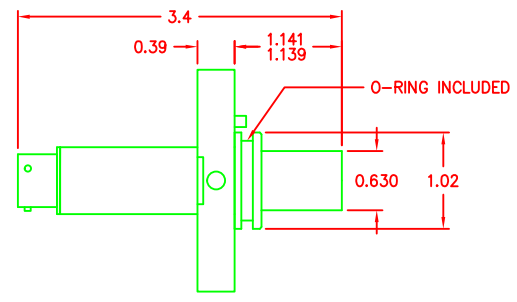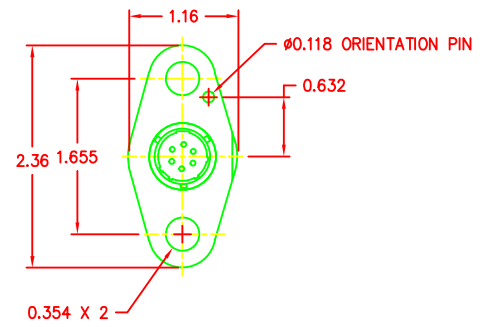

PIN DESCRIPTION	PIN
POWER INPUT 1	A
POWER AND PULSE COMMON 1	B
OUTPUT PULSE 1	C
OUTPUT PULSE 2	D
POWER AND PULSE COMMON 2	E
POWER INPUT 2	F

786 PITTS CHAPEL ROAD
ELIZABETH CITY, NC 27909

MATERIAL	APPROVALS	
300 SERIES STAINLESS	DRAWN W. STAMBAUGH	DATE 08/24/16
FINISH	CHECK M. PRITCHARD	DATE 08/24/16
	ISSUED M. PRITCHARD	DATE 08/24/16

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES OTHER THAN THE SIZE OF RAW MATERIAL SHALL BE HELD AS FOLLOWS:

1 PLACE DECIMAL	±.1
2 PLACE DECIMAL	±.01
3 PLACE DECIMAL	±.005
FRACTIONAL	±1/64
ANGULAR	±1/2°

MOTION SENSORS, INC.

TITLE: **OUTLINE-SPECIFICATION DRAWING DUAL HALL EFFECT, ISOLATED PUSH/PULL TYPE SUPPLY TRACKING OUTPUT, FLANGED HOUSING WITH CONNECTOR**

SIZE C	CAGE CODE OY2U4	DWG NO HD-157	REV -
SCALE NONE	SHEET		