

4

3

2

1




DWG NO. HD-136 SH 1 REV -

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APP




- SUPPLY VOLTAGE: 4.5V TO 30V DC REGULATED
- SUPPLY CURRENT: 10mA MAX
- OUTPUT TYPE: OPEN COLLECTOR, 30V MAX.
- OUTPUT SATURATION VOLTAGE: 0.6V MAX @ 25mA
- PROTECTION: REVERSE POLARITY AND OUTPUT SHORT CIRCUIT
- OPERATING FREQUENCY: 0Hz TO 15KHz
- AIR GAP: 0.100" (SEE NOTE 1)
- DUTY CYCLE: 50% ± 25% DEPENDENT ON TARGET GEOMETRY
- PHASE SHIFT: 90° ± 45° DEPENDENT ON TARGET GEOMETRY (SEE ALIGNMENT)
- ALIGNMENT: 12P (2M) SPUR GEAR CONTACT FACTORY FOR CUSTOM ALIGNMENT
- OPERATING TEMPERATURE: -40°C TO 125°C
- STORAGE TEMPERATURE: -40°C TO 125°C
- MATING CONNECTOR: MIL-DTL-26482 TYPE 10-6SN
- ENVIRONMENT RATING: IP68

NOTES:

1. AIR GAP IS DEPENDENT ON TARGET GEOMETRY AND OPERATING FREQUENCY
HIGHER OPERATING FREQUENCIES AND FINER PITCH GEARS MAY REQUIRE AIR GAPS
LESS THAN 0.100"

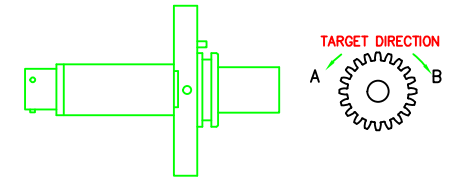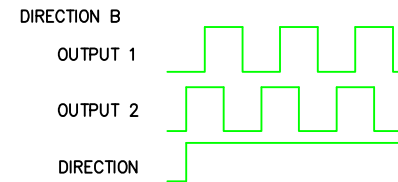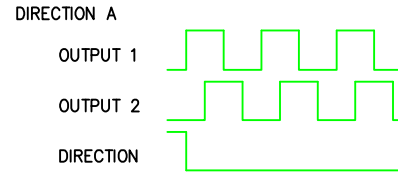

GEAR DIRECTION	OUTPUT 1	OUTPUT 2	DIRECTION
DIRECTION A	LEAD	LAG	0
DIRECTION B	LAG	LEAD	1

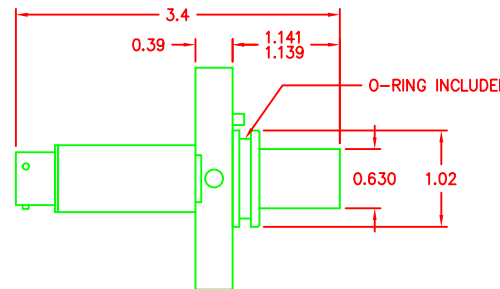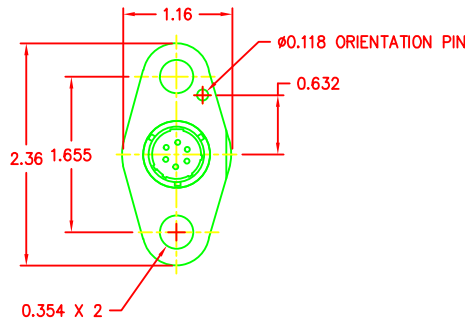

PIN DESCRIPTION	PIN
POWER INPUT	A
POWER AND PULSE COMMON	B
OUTPUT PULSE 1	C
OUTPUT PULSE 2	D
DIRECTION OUTPUT	E
NO CONNECTION	F

MOTION SENSORS
SPEED SENSING SOLUTIONS

786 PITTS CHAPEL ROAD
ELIZABETH CITY, NC 27909

MATERIAL	APPROVALS	
300 SERIES STAINLESS	DRAWN W. STAMBAUGH	DATE 08/24/16
FINISH	CHECK M. PRITCHARD	DATE 08/24/16
	ISSUED M. PRITCHARD	DATE 08/24/16
CONFIDENTIAL PROPERTY OF MOTION SENSORS, INC. (MSI) NOT TO BE DISCLOSED TO OTHERS, REPRODUCED, OR USED FOR ANY OTHER PURPOSE, EXCEPT AS AUTHORIZED IN WRITING BY MSI. MUST BE RETURNED ON DEMAND.		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES OTHER THAN THE SIZE OF RAW MATERIAL SHALL BE HELD AS FOLLOWS: 1 PLACE DECIMAL ±.1 2 PLACE DECIMAL ±.01 3 PLACE DECIMAL ±.005 FRACTIONAL ±1/64 ANGULAR ±1/2°		

MOTION SENSORS, INC.

TITLE
**OUTLINE-SPECIFICATION DRAWING
 DUAL HALL EFFECT, OPEN COLLECTOR OUTPUT
 WITH DIRECTION, FLANGED HOUSING WITH
 CONNECTOR**

SIZE C	CAGE CODE OY2U4	DWG NO HD-136	REV -
SCALE NONE	SHEET		

4

3

2

1